

VERSALIFT LAT-135-H


Pickup mounted articulating telescopic platform



Isuzu D-Max
(3,000 kg GVW)



Full hydraulic controls



Belt driven hydraulic
pump



On & off road




1 kV certified low
voltage insulation



Articulating telescopic
platform

Available specifications

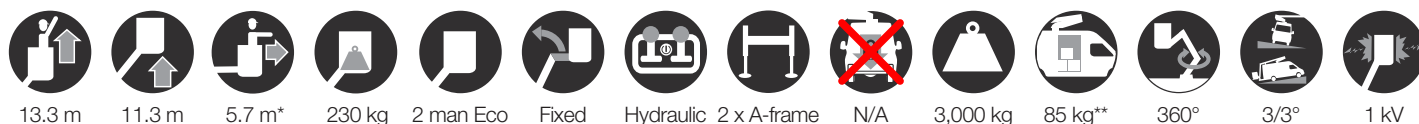

Dimensions



Length: 5,775 mm

Height: 2,500 mm

Wheelbase: 3,095 mm

Key features



Clear deck with space for cabinets



Bucket entry from the vehicle & from the ground



Electro-hydraulic lower controls



Full hydraulic controls

Notes

Technical information is subject to change without prior notice. Images may show optional equipment. Installations and/or options may not be available in your specific region.


* Depending on the vehicle.

** Max payload with a driver, a passenger and a full tank of fuel (230 kg added to the installation weight).

Additional equipment

12V Electric emergency pump
Power outlets in the bucket
Flashing light under the bucket
Aluminium cabinets for the chassis
Parallelogram entrance (for the bucket)
Tilt sensor
Outrigger pads with holders
Airline in the bucket
Removable LED spotlight for the bucket
Cover for the bucket

Diagramme(s)

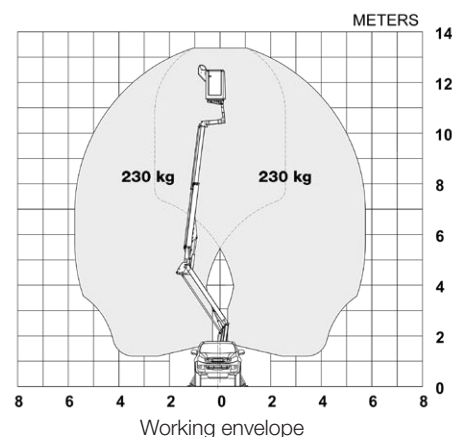

Distributor

C207H (Versalift LAT-38-135-H on Isuzu D-Max Pickup) - revision 2018/10

www.TimeIntl.dk