

VST-39/43/50/55-TN

Articulated/Telescopic Aerial Device

- **WORKING HEIGHT:** Up to 59 ft 7 in (18.2 m)
- **HORIZONTAL REACH:** Up to 30 ft 7 in (9.3 m)
- **PLATFORM CAPACITY:** Up to 500 lbs (227 kg)

JIB & WINCH
OPTIONAL

**LARGE
TOP-MOUNTED
STEEL
PLATFORM**
36 IN X 60 IN X 43 IN



VST-50-TN model shown here.

VERSALIFT®

**LOWER TRUE
COST OF
OWNERSHIP**

VST-39/43/50/55-TN

Articulated/Telescopic Aerial Device

VST-39-TN

VST-43-TN

VST-50-TN

VST-55-TN

GENERAL SPECIFICATIONS:

(Based on 40 in Frame)

Horizontal Reach	26 ft (7.9 m)	30 ft (9.1 m)	30 ft 7 in (9.3 m)	30 ft 2 in (9.2 m)
Maximum Platform Capacity	500 lbs (227 kg)	500 lbs (227 kg)	500 lbs (227 kg)	500 lbs. (227 kg)
Platform Rotation	180°	180°	180°	180°
Inner Boom Extension	79 in (2.0 m)	103 in (2.6 m)	103 in (2.6 m)	53 in (1.35 m)
Outer/Inner Boom Articulation	-25° to +85°	-25° to +85°	-25° to +85°	-25° to +85°
Lower Boom Articulation	0° to +87°	0° to +87°	0° to +84°	0° to +84°
Rotation	360° Continuous	360° Continuous	360° Continuous	360° Continuous

WITH STANDARD PEDESTAL:


Height to Bottom of Platform	39 ft 5 in (12.0 m)	43 ft 5 in (13.2 m)	49 ft 11 in (15.2 m)	54 ft 7 in (16.6 m)
Working Height	44 ft 5 in (13.5 m)	48 ft 5 in (14.8 m)	54 ft 11 in (16.7 m)	59 ft 7 in (18.2 m)
Stowed Travel Height	10 ft 6 in (3.2 m)	10 ft 6 in (3.2 m)	11 ft 0 in (3.4 m)	11 ft 6 in (3.5 m)

HYDRAULIC SYSTEM:

Operating Pressure	3000 psi (207 bar)
Flow Rate	6 gpm (22.7 lpm)
Filtration	10 micron pressure 10 micron return 100 mesh suction
System Type	Open Center

OPTIONS:

- Automatic Boom Latch
- Auxiliary Outriggers
- Backup 12-Volt Pump
- Jib up to 200 lb (90 kg) Capacity (Reduces Platform Capacity)
- Lift Eye (1000 lb max)
- Second Set of Tool Power Ports
- Engine Throttle Control
- Various Pedestal Heights
- 120-Volt Outlet at Platform

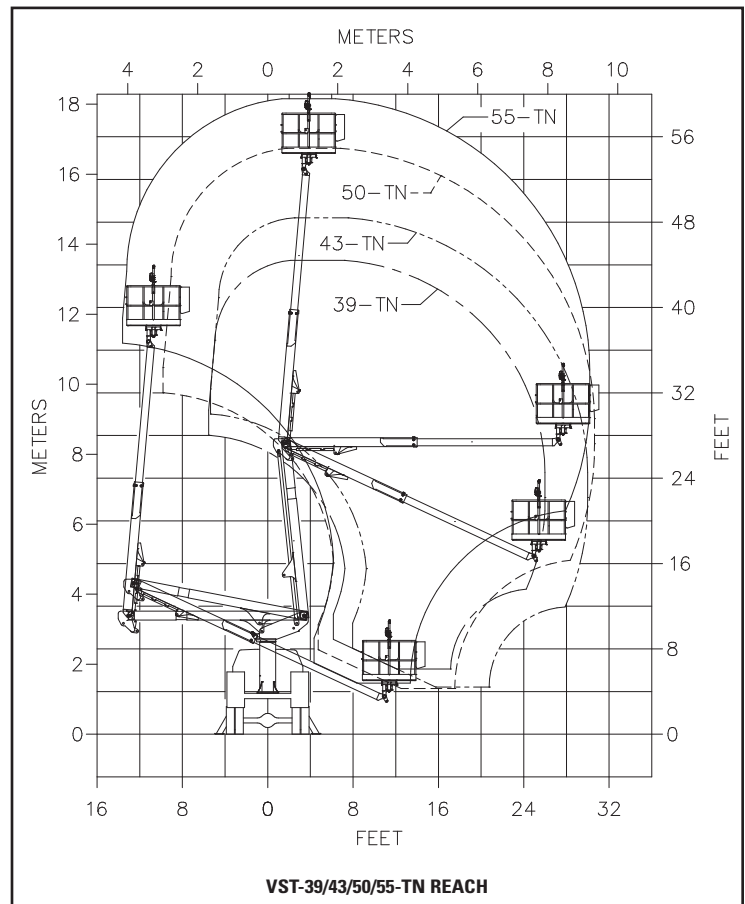

Note: Specifications on units may vary or change without prior notification due to option selections.

REV. 09/19

VERSALIFT is a leading manufacturer of bucket trucks, digger derricks and cable placers. Customers in the electric utility, telecommunications, forestry and sign, light & traffic industries experience a lower true cost of ownership by choosing Versalift. Our equipment is engineered to be lighter, while keeping the designs simple, which provides advantages like less unscheduled maintenance, greater payloads and ease of maintenance. Versalift has the lowest recall rate in the industry making it the smarter and most reliable choice. Versalift aerial lifts are the only units to feature the patented TruGuard® safety system, which provides additional protection to linemen in the bucket. Versalift is a Time Manufacturing Company, and together with Aspen Aerials has more than 1,000 employees worldwide.

REV. 03/19