

VST-6300/6600/7100-I

Articulated Telescopic Aerial Device

HORIZONTAL REACH: Up To 42' 6" (12.9 m)

WORKING HEIGHT: Up To 75 ft 10 in. (23.1 m)

STOWED TRAVEL HEIGHT: 12 ft 6 in. (3.8 m)

OPTIMAL MAX PLATFORM CAPACITY: 800 lbs. (360 kg)

MATERIAL HANDLER JIB CAPACITY: 2000 lbs. (907.2 kg)



The **VERSALIFT** product line has grown to encompass models for every market. Whether it be a 29' man lift or a 108' material handler, there is a **VERSALIFT** to get the job done.

For more information

Versalift
254.399.2100
www.VERSALIFT.com

VST-6300/6600/7100-I

Articulated Telescopic Aerial Device



General Specifications

	VST-6300-I	VST-6600-I	VST-7100-I
Maximum Platform Capacity	800 lbs. (360 kg)	800 lbs. (360 kg)	800 lbs. (360 kg)
Maximum Platform Capacity with Optional Jib Installed	700 lbs. (317 kg)	700 lbs. (317 kg)	700 lbs. (317 kg)
Lower Boom Lift Eye Capacity (Optional)	1500 lbs. (680 kg)	1500 lbs. (680 kg)	1500 lbs. (680 kg)
Maximum Jib Capacity (Optional)	2000 lbs. (907 kg)	2000 lbs. (907 kg)	2000 lbs. (907 kg)

STANDARD PEDESTAL (28 IN. [0.71 M] TALL)


	VST-6300-I	VST-6600-I	VST-7100-I
Horizontal Reach	39 ft. 1 in. (11.9 m)	39 ft. 11 in. (12.2 m)	42 ft. 6 in. (12.9 m)
Height to Bottom of Platform	63 ft. 2 in. (19.3 m)	65 ft. 6 in. (19.9 m)	70 ft. 10 in. (21.6 m)
Working Height	68 ft. 2 in. (23.1 m)	70 ft. 6 in. (21.5 m)	75 ft. 10 in. (23.1 m)
Stowed Travel Height	12 ft. 6 in. (3.8 m)	12 ft. 10 in. (3.9 m)	12 ft. 6 in. (3.8 m)
Weight of Lift w/out Subframe and Outriggers	8,065 lbs (3660 kg)	8,175 lbs (3710 kg)	8,375 lbs (3880 kg)
Weight of Lift w/ Standard Subframe and Dual X-frame Outriggers	12,175 lbs (5525 kg)	12,285 lbs (5572 kg)	12,565 lbs (5700 kg)

Hydraulic System

Operating Pressure	3000 psi (210 kg/cm ²)
Flow Rate	10 gpm (38 lpm)
Filtration	10 Micron Return 100 Mesh Suction
System Type	Open Center
Power Source	PTO Pump

Insulation Gaps

Upper Boom Insulation Gap	71 in (1.8 m)
Lower Boom Insulation Gap	24 in (0.61 m)

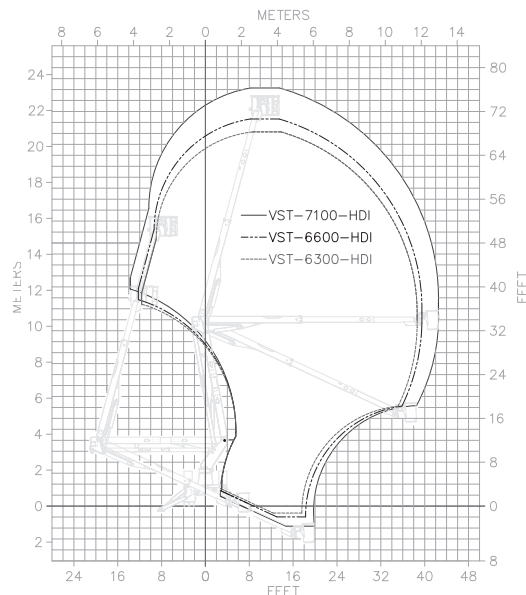

OPTIONS:

- Auxiliary Outriggers
- Second Set of Tool Power Ports
- Lifting Eye
- Two-Speed Manual Throttle Control or 1000 lbs. Manual/Hydraulic Jib And Winch
- Various Pedestal Heights
- TruGuard™
- Platform Elevator (single platform only)
- Automatic Boom Latch

NOTE:

1. Specifications may vary without prior notice
2. Required GVWR can vary significantly with chassis, lift mounting, location, service body, accessories and desired payload.