

VERSALIFT LT-130-TB

Chassis mounted telescopic platform




IVECO

Iveco Daily
(3,500 kg GVW)



Available for class B
driving licence



Belt driven hydraulic
pump



Proportional RLC
controls



Telescopic platform



1 kV certified low
voltage insulation

Available specifications



Dimensions



Length: 6,725 mm

Height: 2,820 mm

Wheelbase: 3,750 mm

Key features



A-frame outriggers (2 pairs)



Full hydraulic outrigger setup



Lower control panel (wired remote control panel)



RLC (Relay Lefthand proportional Controls): Fixed outreach and 1 action at a time

Notes

Technical information is subject to change without prior notice. Images may show optional equipment. Installations and/or options may not be available in your specific region.


* Depending on the vehicle.

** Max payload with a driver, a passenger and a full tank of fuel (215 kg added to the installation weight).

Additional equipment

12V Electric emergency pump
Flashing light under the bucket
Power outlets in the bucket
Amber LED beacons on the turret
Parallelogram door switch
Tilt sensor
Plastic toolbox for the bucket
Outrigger pads with holders
Sliding work table for the bucket
Removable LED spotlight for the bucket

Diagramme(s)

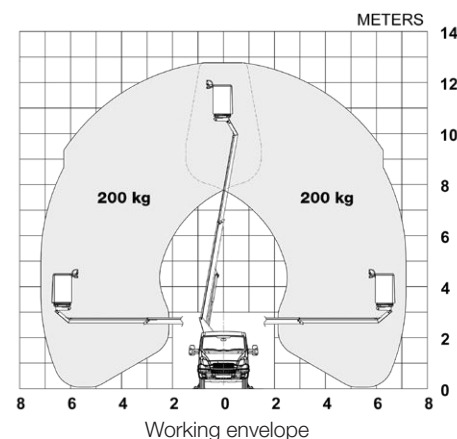

Distributor