

# VERSALIFT VTX-240

Chassis mounted platform with two 3-stage telescopic booms



Mercedes-Benz Sprinter  
(3,500 kg GVW)



Reach worksites up and  
over obstacles



Reach worksites below  
the vehicle



Automatic setup and  
packing



Available for class B  
driving licence



2 x 90° bucket rotation

## Available specifications



## Dimensions



**Length:** 7,825 mm


**Height:** 2,260 mm

**Wheelbase:** 4,325 mm


## Additional equipment

- Outrigger pads with holders
- Safety stripes (red/white)
- Flashing lights on the vehicle
- Demo seat covers and floor mats
- Safety lanyard and harness

## Diagramme(s)

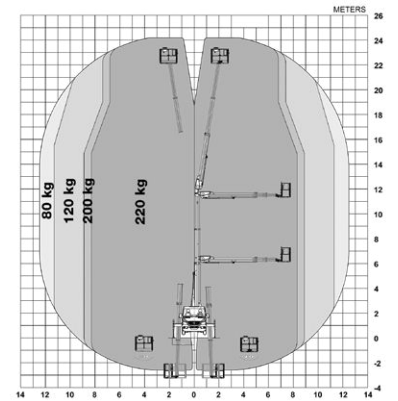

Working envelope

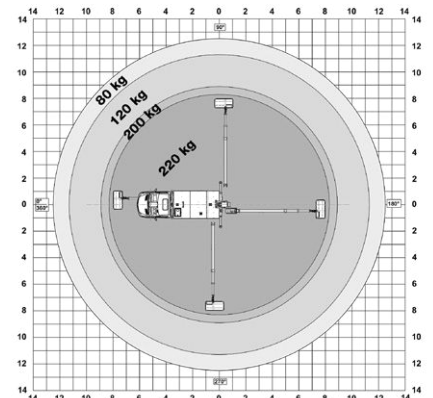

Working envelope

## Key features



'Up and over' reach: 11 metres up and 12.5 metres out



Ability to work below ground level (-3,3 meters)



6 cm ground clearance below the end mounted aluminium basket



FPC (Full Proportional CANbus): Variable outreach, up to 4 simultaneous actions and home function

## Notes

Technical information is subject to change without prior notice. Images may show optional equipment. Installations and/or options may not be available in your specific region.

\* Depending on the vehicle.

\*\* Max payload with a driver, a passenger and a full tank of fuel (225 kg added to the installation weight).

## Distributor