

VERSALIFT LT-90-TB

Pickup mounted telescopic platform



Ford Ranger
(3,200 kg GVW)



Available for class B
driving licence



Belt driven hydraulic
pump



No outriggers for quick
setup & packing



Compact total
installation length



Proportional RLC
controls

Available specifications



Dimensions



Length: 5,280 mm


Height: 2,750 mm

Wheelbase: 3,220 mm

Additional equipment

- 12V Electric emergency pump
- Flashing light under the bucket
- Power outlets in the bucket
- Amber LED beacons on the turret
- Parallelogram door switch
- Tilt sensor
- Plastic toolbox for the bucket
- Removable LED spotlight for the bucket
- Sliding work table for the bucket
- Flashing lights on the vehicle

Diagramme(s)

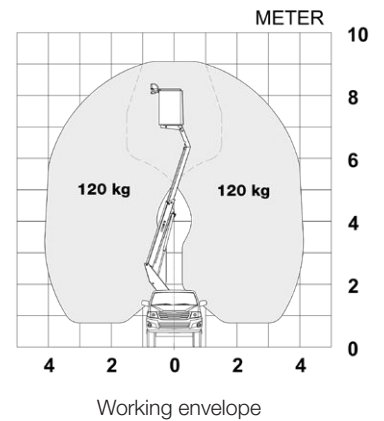

Key features



1 man "Eco" fibreglass bucket



No outriggers required for stability



Lower control panel (wired remote control panel)



RLC (Relay Lefthand proportional Controls): Fixed outreach and 1 action at a time

Notes

Technical information is subject to change without prior notice. Images may show optional equipment. Installations and/or options may not be available in your specific region.

* Depending on the vehicle.

** Max payload with a driver, a passenger and a full tank of fuel (220 kg added to the installation weight).

Distributor