

VERSALIFT ETL-32-125


Van mounted telescopic platform



Iveco Daily
(3,500 kg GVW)



Available for class B
driving licence



Belt driven hydraulic
pump



Emergency lowering
controls at the pedestal




Knuckle/turret tailswing
within the mirrors



No outriggers for quick
setup & packing

Specifications

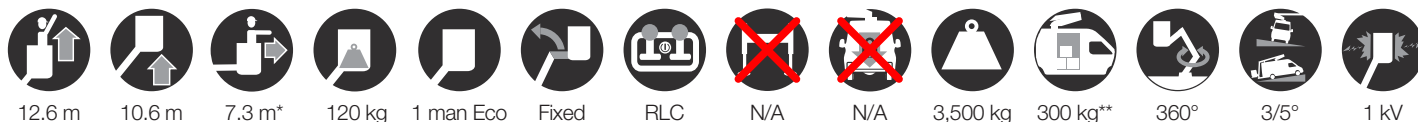

Dimensions



Length: 6,792 mm

Height: 3,360 mm

Wheelbase: 3,520 mm

Key features



Ground level emergency lowering from the load area (pedestal mounted valve bank)



Workshop interior (optional)



Rear platform (Bucket stowed asymmetrically)



RLC (Relay Lefthand proportional Controls): Fixed outreach and 1 action at a time

Notes

Technical information is subject to change without notice. Images may show optional equipment.


* Depending on the vehicle.

** Max payload with a driver, a passenger and a full tank of fuel (220 kg added to the installation weight).

Optional equipment

12V Electric emergency pump
Power outlets in the bucket
Flashing light under the bucket
Amber LED beacons on the turret
Workshop interior
Tow bar
Tilt sensor
Removable LED spotlight
Sliding work table for the bucket
Plastic toolbox for the bucket

Diagramme(s)

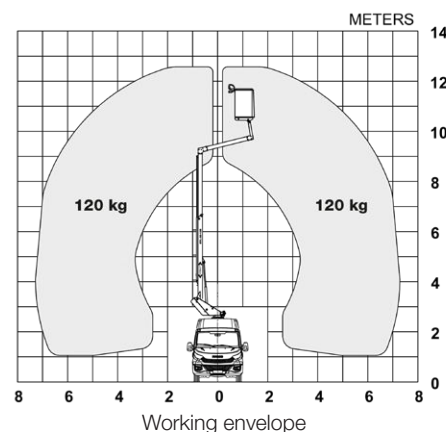

Retailer

V821R (Versalift ETL-32-125 on Iveco Daily Van) - revision 2018/07