


VERSALIFT



TMD-4050-T

Maximum Capacity:	Capacity at 10 ft Radius:	Horizontal Reach:			Sheave Height:			Load Radius:			Digging Radius:	
		B1	B2	B3	A1	A2	A3	R1	R2	R3	S1	S2
30500 lb	17700 lb	20.6 ft	31.2 ft	40.2 ft	31.0 ft	41.5 ft	50.3 ft	4.6 ft	6.4 ft	8.0 ft	18.1 ft	28.8 ft
13850 kg	8050 kg	6.3 m	9.5 m	12.3 m	9.4 m	12.6 m	15.3 m	1.4 m	2.0 m	2.4 m	5.5 m	8.8 m

- Best in class payload due to smarter, lightweight design
- Ease of Maintenance with non-lube bearings, and a single grease fitting for the rotation bearing
- 30,500 lbs maximum capacity and 40.2 ft of horizontal reach
- Full pressure Hydraulic controls with open center system
- Radio remote controls with closed center hydraulic system
- Many options and configurations, including A-Frame or Radial Outriggers, are available

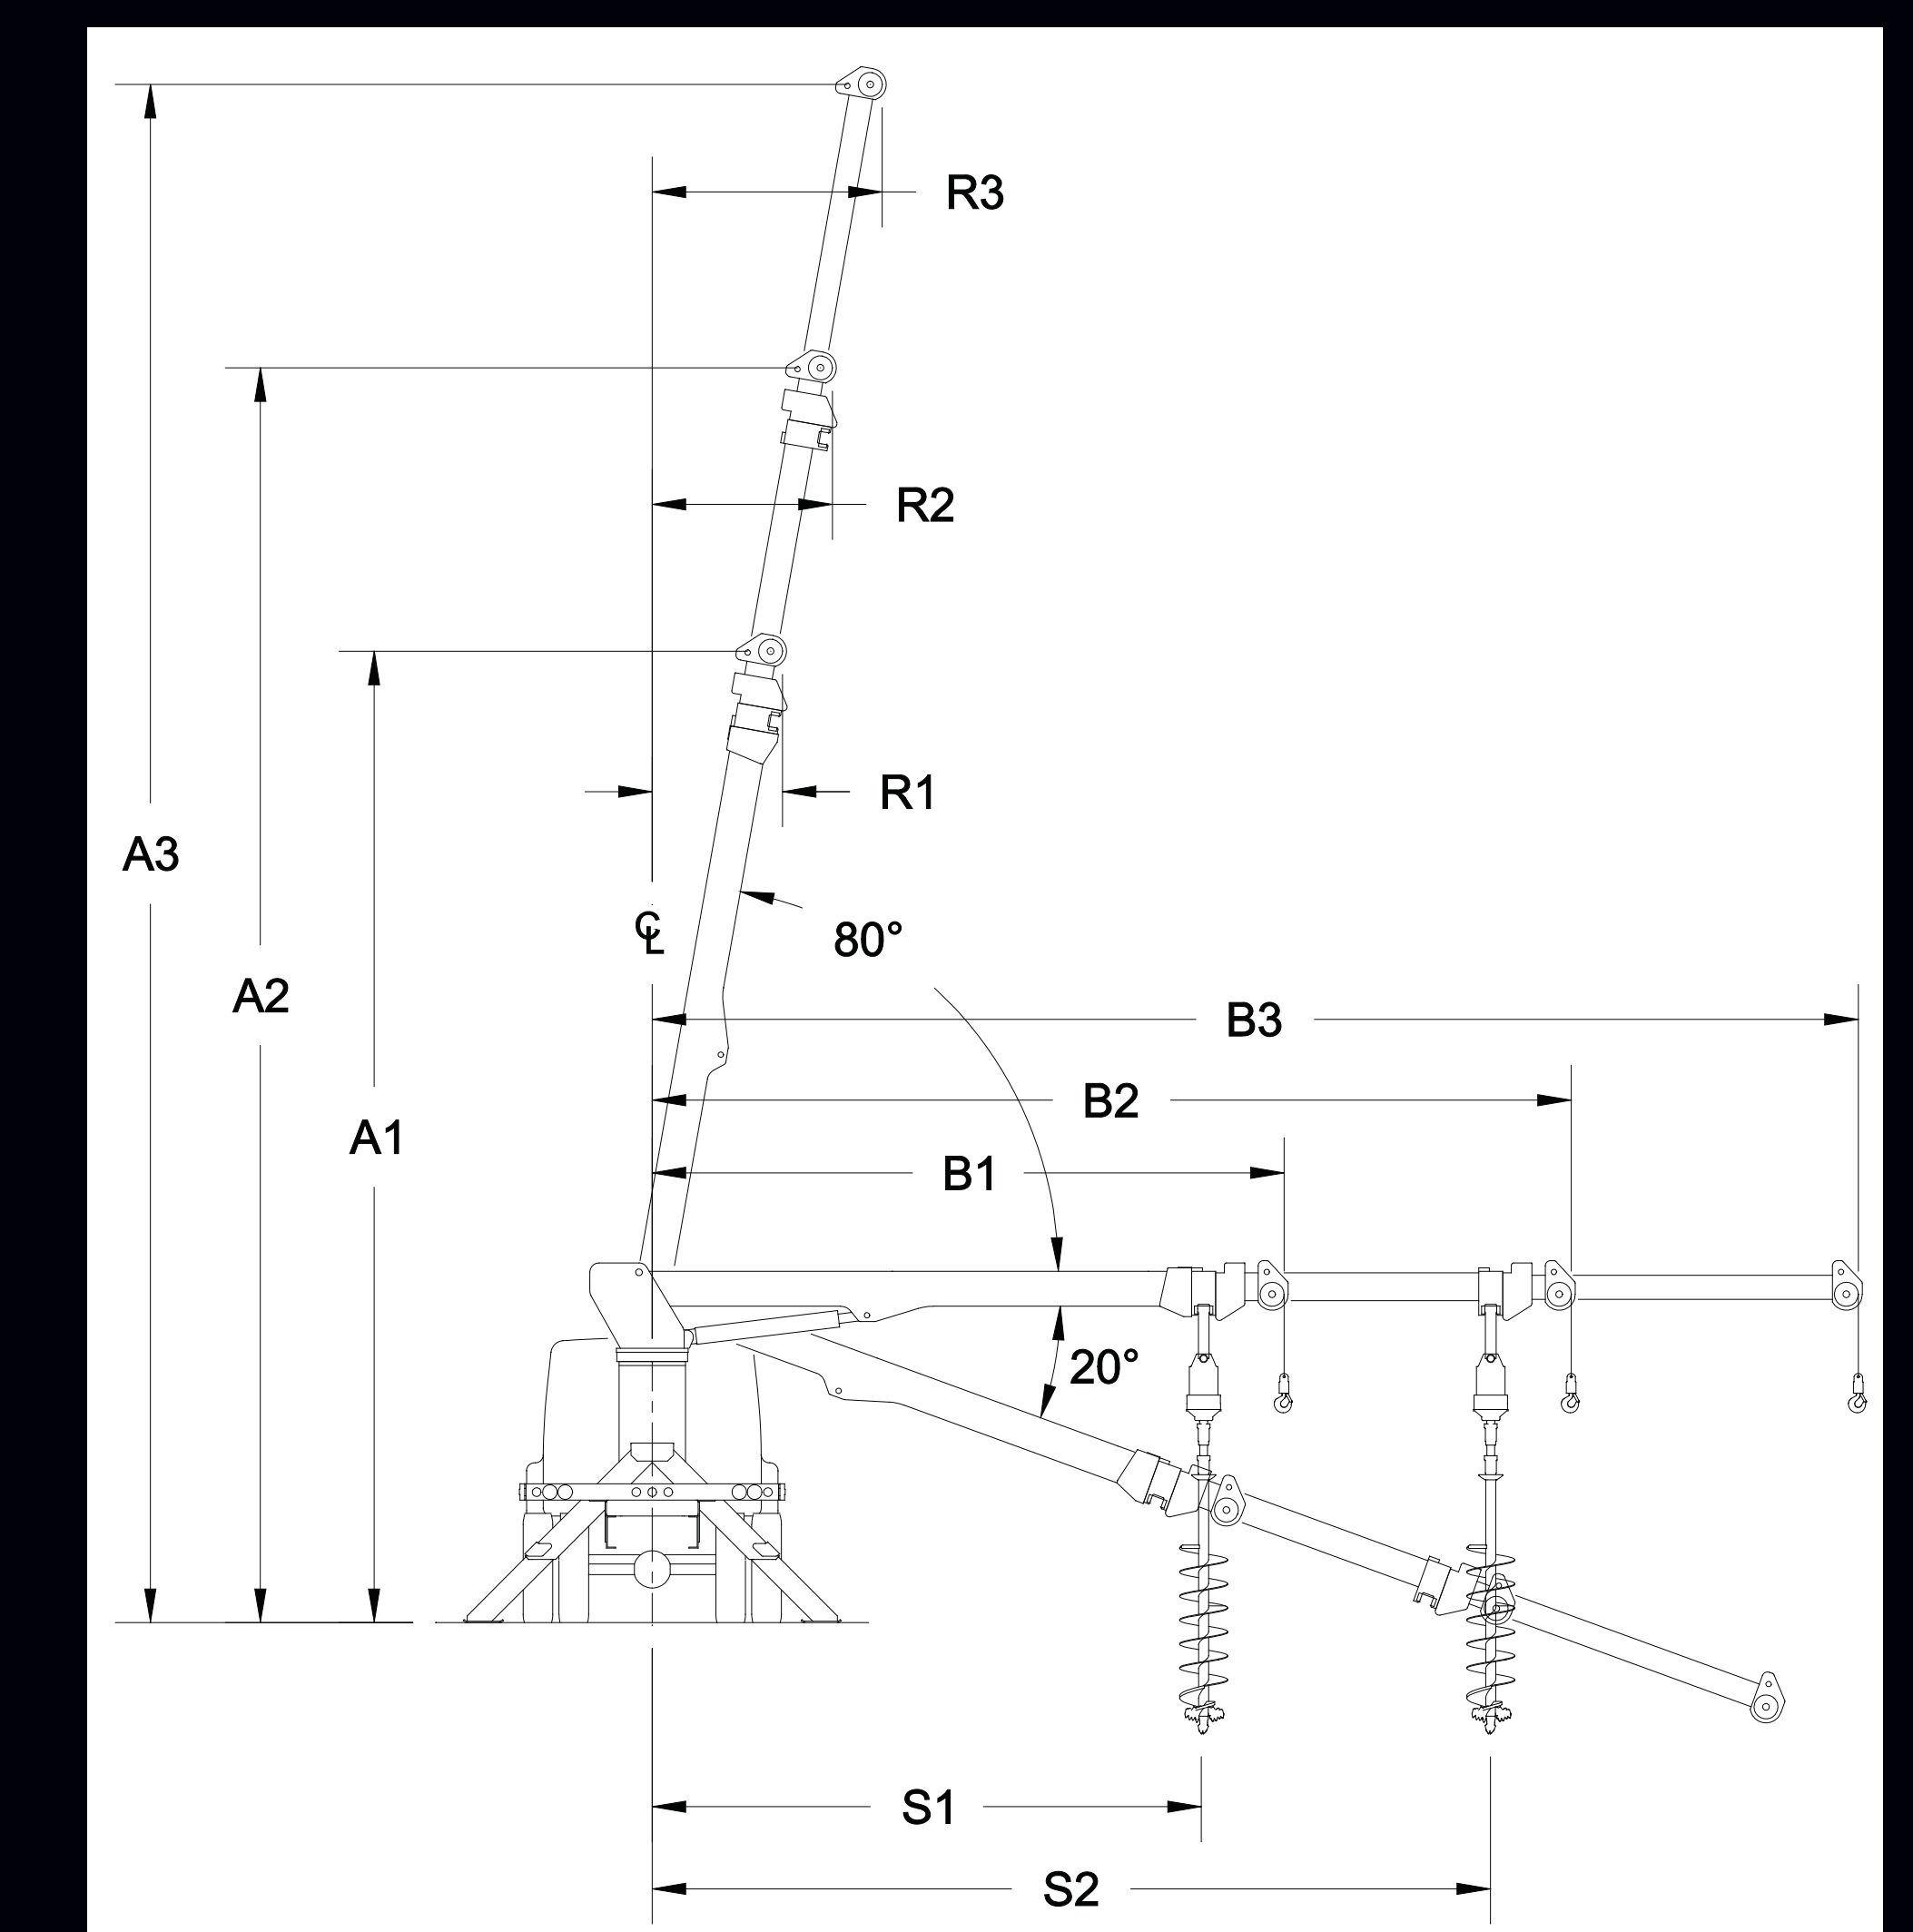

HEAVY-DUTY DIGGER DERRICK



TRACK-MOUNTED DIGGERS & AERIALS

MOROOKA DIMENSIONS	MST-1500VDL
Length	23 ft 8 in
Width	8 ft 6 in
Height	9 ft 10 in
Min Ground Clearance	19 in
Track Width	28 in
Rear Frame Rail	2 ft 5 in
Front Frame Rail	23 ft 8 in
Frame Rail Width	34 in
Weight	21,660 lbs
Fuel Capacity	53 gal
Engine MGF.	Caterpillar® C7.1
HorsePower	225
Transmission	HST
Maximum Load	20,000 lbs
Travel Speed	0 - 7.5 MPH
Ground Pressure (EMPTY/LOADED)	21,660 lbs

MOROOKA
Rubber Track Carriers

- MST-1500-VDL is capable to be upfitted with any Versalift digger derrick up to 50’ sheave height or aerial lift up to 100’
- Combined heavy duty power and small size make th unit uniquely valuable
- Lower true cost of ownership due to smarter design and more reliable design
- Warranty: 12 months, or 1,000 hours
- Built in the USA, including Caterpillar engine

VERSATILITY AT ITS BEST