

TEL-31/35-NE

Telescopic Aerial

WORKING HEIGHT: Up to 39 ft 11 in

HORIZONTAL REACH: Up to 20 ft 7 in

PLATFORM CAPACITY: Up to 440 lbs



VERSALIFT

VERSALIFT is a leading manufacturer of bucket trucks, digger derricks, aerial lifts and other specialty equipment for power generation, transmission and distribution, investor-owned utility, telecommunications, light and sign, and tree care industries. Working with co-ops, municipalities, government agencies and corporations through its global network of facilities and family of dealers, the company employs nearly 800 associates worldwide.

7601 Imperial Drive, Waco, Texas 76712 | 254-399-2100 | www.VERSALIFT.com

TEL-31/35-NE

Telescopic Aerial



GENERAL SPECIFICATIONS

| | TEL-31-NE | TEL-35-NE |
|----------------------------|-------------------------------|-------------------------------|
| Horizontal Reach | 16.58 ft (4.88 m) | 20.58 ft (6.1 m) |
| Standard Platform Capacity | 440 lbs (200 kg) | 440 lbs (200 kg) |
| Outer Boom Travel | -25° to +80° | -25° to +80° |
| Inner Boom Extension | 92 in (2.34 m) | 116 in (2.95 m) |
| Ambient Temperature Range | -40°F (-40°C) to 125°F (52°C) | -40°F (-40°C) to 125°F (52°C) |

STANDARD PEDESTAL


| | TEL-31-NE | TEL-35-NE |
|-------------------------------------|--------------------|--------------------|
| Height to Bottom of Platform | 30.92 ft (9.14 m) | 34.92 ft (10.36 m) |
| Working Height | 35.92 ft (10.67 m) | 39.92 ft (11.89 m) |
| Stowed Travel Height | 10.83 ft (3.05 m) | 10.83 ft (3.05 m) |
| Weight of Lift w/ Mounting Hardware | 1545 lbs (701 kg) | 1575 lbs (714 kg) |

6 IN. (152 MM) TALLER PEDESTAL


| | TEL-31-NE | TEL-35-NE |
|-------------------------------------|-------------------|-------------------|
| Height to Bottom of Platform | 31.42 (9.58 m) | 35.42 (10.8 m) |
| Working Height | 36.42 (11.1 m) | 40.42 (12.32 m) |
| Stowed Travel Height | 11.33 (3.45 m) | 11.33 (3.45 m) |
| Weight of Lift w/ Mounting Hardware | 1560 lbs (708 kg) | 1590 lbs (721 kg) |

12 IN. (305 MM) TALLER PEDESTAL

| | TEL-31-NE | TEL-35-NE |
|-------------------------------------|-------------------|-------------------|
| Height to Bottom of Platform | 31.92 (9.73 m) | 35.92 (10.95 m) |
| Working Height | 36.92 (11.25 m) | 40.92 (12.47 m) |
| Stowed Travel Height | 11.83 (3.61 m) | 11.83 (3.61 m) |
| Weight of Lift w/ Mounting Hardware | 1575 lbs (714 kg) | 1605 lbs (728 kg) |

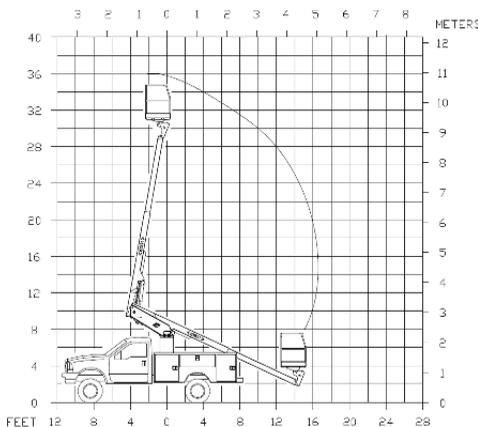

TEL-31-NE

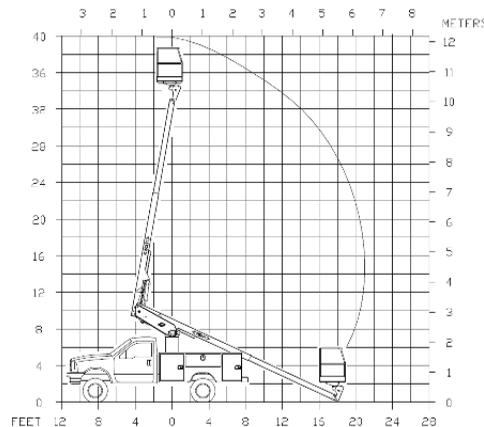

TEL-35-NE

NOTE:

1. Specifications may vary without prior notice
2. Required GVWR can vary significantly with chassis, lift mounting, location, service body, accessories and desired payload.

OPTIONS:

- 180° Platform Rotation
- Backup Pump
- Individual Upper Controls
- 2-man Steel or Fiberglass Platform Available
- 6" or 12" Taller Platform