

VST-5000/5500/6000-I

Insulated Articulated/Telescopic Aerial Device

- **WORKING HEIGHT:** Up to 65 ft 1 in (19.8 m)
- **HORIZONTAL REACH:** Up to 38 ft 9 in (11.8 m)
- **PLATFORM CAPACITY:** Up to 750 lbs (340 kg)

**MATERIAL
HANDLING**
AVAILABLE WITH
VARIOUS OPTIONS

TruGuard®
STANDARD



*VST-6000-I model shown here with
Material Handling option.*

VERSALIFT®

**LOWER TRUE
COST OF
OWNERSHIP**

VST-5000/5500/6000-I

Insulated Articulated/Telescopic Aerial Device



VST-5000-I

VST-5500-I

VST-6000-I

GENERAL SPECIFICATIONS:

(Based on 40 in Frame)

Horizontal Reach	36 ft 8 in (11.2 m)	37 ft 11 in (11.6 m)	38 ft 9 in (11.8 m)
Maximum Platform Capacity	750 lbs (340 kg)	750 lbs (340 kg)	750 lbs (340 kg)
Inner Boom Extension	141 in (3.58 m)	141 in (3.58 m)	141 in (3.58 m)
Outer/Inner Boom Articulation +/- 2°	-25° to +85°	-25° to +85°	-25° to +85°
Lower Boom Articulation +/- 2°	0° to +92°	0° to +92°	0° to +86°
Rotation	360° Continuous	360° Continuous	360° Continuous

WITH STANDARD PEDESTAL:

Height to Bottom of Platform	49 ft 8 in (15.1 m)	55 ft 3 in (16.8 m)	60 ft 1 in (18.3 m)
Working Height	54 ft 8 in (16.7 m)	60 ft 3 in (18.4 m)	65 ft 1 in (19.8 m)
Stowed Travel Height	11 ft 11 in (3.6 m)	11 ft 11 in (3.6 m)	11 ft 11 in (3.6 m)

INSULATION GAP:


Upper Boom Fully Retracted	38 in (1.0 m)	51 in (1.3 m)	38 in (1.0 m)
Upper Boom Fully Extended	172 in (4.4 m)	185 in (4.7 m)	179 in (4.5 m)
Lower Boom	24 in (0.61 m)	24 in (0.61 m)	24 in (0.61 m)

HYDRAULIC SYSTEM:

Operating Pressure	3000 psi (207 bar)
Flow Rate	7.5 gpm (28 lpm)
Filtration	10 micron return 100 mesh suction
System Type	Open Center

OPTIONS:

- Automatic Boom Latch
- Auxiliary Outriggers
- Backup 12-Volt Pump
- Jib up to 1000 lb (454 kg) capacity
- Various Jib Configurations
(Reduces Platform Capacity 100 lbs)
- Lift Eye (1000 lb max)
- Second Set of Tool Power Ports
- Various Platforms, Covers and Liners
- Tool Power at Ground Controls
- Taller Pedestal
- Two Speed Manual Throttle Control
- Platform Elevator

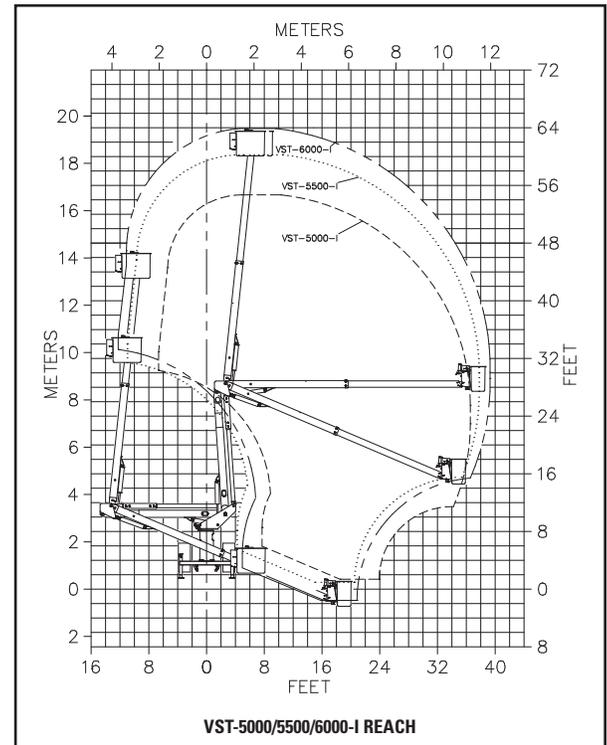

Note: Specifications on units may vary or change without prior notification due to option selections.

REV. 09/19

VERSALIFT is a leading manufacturer of bucket trucks, digger derricks and cable placers. Customers in the electric utility, telecommunications, forestry and sign, light & traffic industries experience a lower true cost of ownership by choosing Versalift. Our equipment is engineered to be lighter, while keeping the designs simple, which provides advantages like less unscheduled maintenance, greater payloads and ease of maintenance. Versalift has the lowest recall rate in the industry making it the smarter and most reliable choice. Versalift aerial lifts are the only units to feature the patented TruGuard® safety system, which provides additional protection to linemen in the bucket. Versalift is a Time Manufacturing Company, and together with Aspen Aerials has more than 1,000 employees worldwide.

REV. 03/19