

# VST-6300/6600/7100-HDI

*Insulated Articulated/Telescopic Aerial Device*

- **WORKING HEIGHT:** Up to 75 ft 10 in (23.1 m)
- **HORIZONTAL REACH:** Up to 42 ft 6 in (12.9 m)
- **PLATFORM CAPACITY:** Up to 800 lbs (360 kg)

**MATERIAL  
HANDLING**  
AVAILABLE WITH  
VARIOUS OPTIONS

**JIB  
CAPACITY**  
UP TO 2000 LB  
(OPTIONAL)



*VST-7100-HDI model shown here.*

**VERSALIFT®**

**LOWER TRUE  
COST OF  
OWNERSHIP**

# VST-6300/6600/7100-HDI



Insulated Articulated/Telescopic Aerial Device

## VST-6300-HDI

## VST-6600-HDI

## VST-7100-HDI

### GENERAL SPECIFICATIONS:

(Based on 40 in Frame)

	VST-6300-HDI	VST-6600-HDI	VST-7100-HDI
Horizontal Reach	38 ft 8 in (11.8 m)	39 ft 6 in (12.04 m)	42 ft 6 in (12.9 m)
Maximum Platform Capacity	800 lbs (360 kg)	800 lbs (360 kg)	800 lbs (360 kg)
Inner Boom Extension	123.5 in (3.1 m)	133.5 in (3.4 m)	157.75 in (4 m)
Outer/Inner Boom Articulation +/- 2°	-25° to +75°	-25° to +75°	-25° to +75°
Lower Boom Articulation +/- 2°	0° to +84°	0° to +82°	0° to +80°
Rotation	360° Continuous	360° Continuous	360° Continuous

### WITH STANDARD PEDESTAL:

	VST-6300-HDI	VST-6600-HDI	VST-7100-HDI
Height to Bottom of Platform	63 ft 2 in (19.3 m)	65 ft 6 in (20 m)	70 ft 10 in (21.6 m)
Working Height	68 ft 2 in (20.8 m)	70 ft 6 in (21.5 m)	75 ft 10 in (23.1 m)
Stowed Travel Height	12 ft 10 in (3.9 m)	12 ft 10 in (3.9 m)	12 ft 6 in (3.8 m)

### INSULATION GAP:


	VST-6300-HDI	VST-6600-HDI	VST-7100-HDI
Upper Boom	71 in (1.8 m)	71 in (1.8 m)	71 in (1.8 m)
Lower Boom	24 in (0.61 m)	24 in (0.61 m)	24 in (0.61 m)

### HYDRAULIC SYSTEM:

Operating Pressure	3000 psi (207 bar)
Flow Rate	10 gpm (38 lpm)
Filtration	10 micron return 100 mesh suction
System Type	Open Center

### OPTIONS:

- Automatic Boom Latch
- Backup 12-Volt Pump
- Jib up to 2000 lb (907 kg) capacity
- Various Jib Configurations  
(Reduces Platform Capacity 100 lbs)
- Lift Eye (1500 lb max)
- Platform Elevator
- Second Set of Tool Power Ports
- Tool Power at Ground Controls
- Various Outriggers
- Various Platforms, Covers and Liners

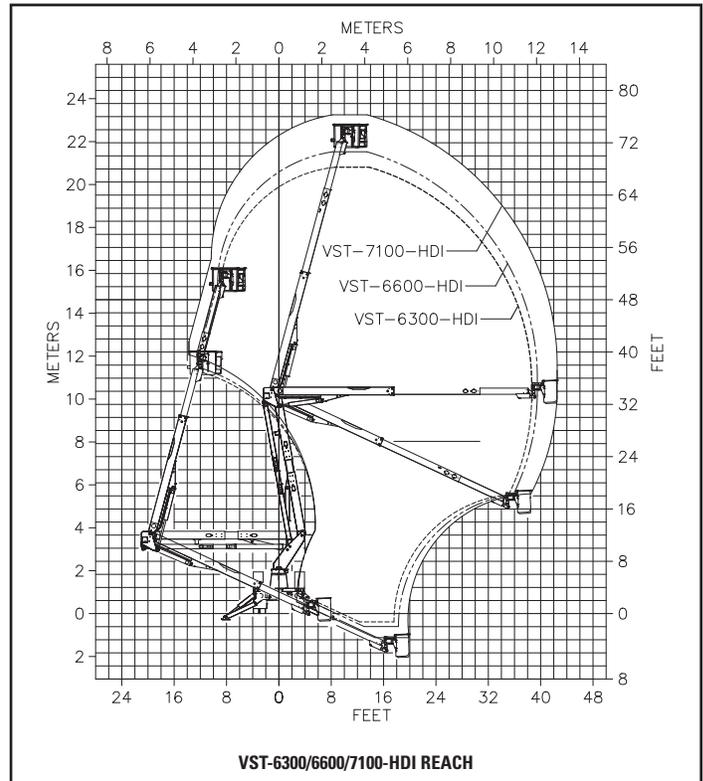

Note: Specifications on units may vary or change without prior notification due to option selections.

REV. 09/19

**VERSALIFT** is a leading manufacturer of bucket trucks, digger derricks and cable placers. Customers in the electric utility, telecommunications, forestry and sign, light & traffic industries experience a lower true cost of ownership by choosing Versalift. Our equipment is engineered to be lighter, while keeping the designs simple, which provides advantages like less unscheduled maintenance, greater payloads and ease of maintenance. Versalift has the lowest recall rate in the industry making it the smarter and most reliable choice. Versalift aerial lifts are the only units to feature the patented TruGuard® safety system, which provides additional protection to linemen in the bucket. Versalift is a Time Manufacturing Company, and together with Aspen Aerials has more than 1,000 employees worldwide.

REV. 03/19