

VST-9500-MHI

Insulated Articulated Telescopic Aerial Device

HORIZONTAL REACH: 61' 8" (18.6 m)

WORKING HEIGHT: 99' 10" (30.2 m)

STOWED TRAVEL HEIGHT: 12' 5" (3.7 m)



VERSALIFT

VERSALIFT is a leading manufacturer of bucket trucks, digger derricks, aerial lifts and other specialty equipment for power generation, transmission and distribution, investor-owned utility, telecommunications, light and sign, and tree care industries. Working with co-ops, municipalities, government agencies and corporations through its global network of facilities and family of dealers, the company employs nearly 800 associates worldwide.


7601 Imperial Drive, Waco, Texas 76712 | 254-399-2100 | www.VERSALIFT.com

VST-9500-MHI

Insulated Articulated Telescopic Aerial Device



General Specifications	VST-9500-MHI	Hydraulic System	
Horizontal Reach	61.67 ft (18.59 m)	Operating Pressure	3000 psi (210 kg/cm ²)
Maximum Platform Capacity	600 lbs (272 kg)	Flow Rate	10 gpm (38 lpm)
Maximum Platform Capacity <i>(with Optional Jib Installed)</i>	500 lbs. (227 kg)	Filtration	10 Micron Return 100 Mesh Suction
Lower Boom Lift Eye Capacity (Optional)	1500 lbs (680 kg)	System Type	Open Center
Maximum Jib Capacity (Optional)	1000 lbs. (454 kg)	Power Source	PTO Pump
STANDARD PEDESTAL		Insulation Gaps	
Height to Bottom of Platform	94.75 ft (30.18 m)	Upper Boom Insulation Gap	52 in (1.32 m)
Working Height	99.75 ft (28.65 m)	Lower Boom Insulation Gap	24 in (0.61 m)
Stowed Travel Height	12.42 ft (3.66 m)		
Weight of Lift w/ Subframe and Outriggers	9,950 lbs.(4513 kg)		
Weight of Lift w/ Standard Subframe and Dual X-frame Outriggers	15,200 lbs (6895 kg)		
BOOM ACTION			
Outer/Inner Boom Travel +/- 2°	-25° to +75°		
Lower Boom Travel +/- 2°	0° to +88°		
Inner Boom Extension	256 in (6.5 m)		
Rotation	360° Continuous		
		NOTE:	
		1. Specifications may vary without prior notice	
		2. Required GVWR can vary significantly with chassis, lift mounting, location, service body, accessories and desired payload.	

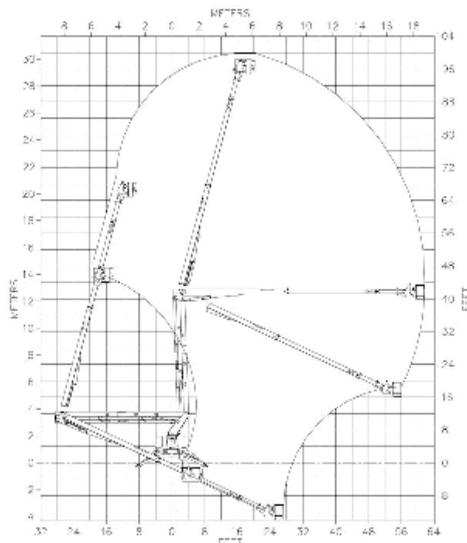

OPTIONS:

- Auxiliary Outriggers
- Second Set of Tool Power Ports
- Lifting Eye
- 1,000 lbs. Manual/Hydraulic Jib and Winch
- Various Pedestal Heights
- TruGuard™
- Auto Boom Latch
- Radial Outriggers
- Out and Down Outriggers