

HIGHEST WORKING HEIGHT ON A NON-CDL.



VST-55-HDI | ARTICULATED TELESCOPIC

REACH HIGHER. STAY NON-CDL.

The VST-55-HDI delivers the industry's highest working height on a Non-CDL chassis with insulated telescopic performance, two-man platform, and available material handling capability.

Built for utility crews who need maximum reach without moving up to a CDL chassis.

BEST-IN-CLASS PAYLOAD

A lighter build leaves more capacity for what matters.

- More usable payload
- Increased job-ready capacity
- More configurations that stay under CDL

HEAVY-DUTY PLATFORM CONSTRUCTION

Built for demanding utility and municipal work.

- 600 lb platform capacity
- Two-man platform up to 24 x 48 in
- Optional platform elevator

MATERIAL HANDLING FLEXIBILITY

Optional jib and winch configurations help crews lift, move, and position material without bringing in another machine.

Jib capacities up to 1,000 lb help reduce the need for additional equipment on the jobsite.



INDUSTRIES

Municipalities | Electric Utilities | Co-op

SPECIFICATIONS

Horizontal Reach	33 ft 5 in (10.2 m)
Maximum Platform Capacity	600 lbs (272 kg)
Inner Boom Extension	103 in (2.6 m)
Outer/Inner Boom Articulation	-25° to +80°
Lower Boom Articulation	81°

Rotation	360° Continuous
----------	-----------------

WITH STANDARD PEDESTAL

Height to Bottom of Platform	54 ft 6 in (16.6 m)
Working Height	59 ft 6 in (18.2 m)
Stowed Travel Height	11 ft 1 in (3.4 m)

INSULATION GAP

Upper Boom Fully Retracted	54 in (1.4 m)
Lower Boom	12 in (305 mm)

HYDRAULIC SYSTEM

Operating Pressure	3000 psi (207 bar)
Flow Rate	6 gpm (22.7 lpm)
System Type	Open Center




800-825-1085
Versalift.com

Note: Specifications on units may vary or change without prior notification due to option selections.

REACH DIAGRAM

Reach and dimensions vary by platform, pedestal, and selected options.

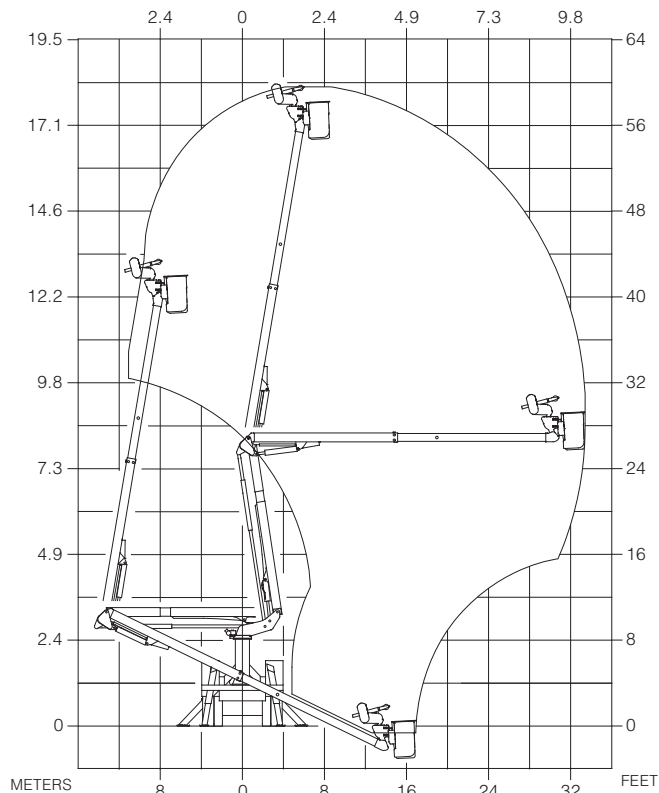


OPTIONS

Outfit your VST-55 for the way your crews actually work. From added stability to expanded tool access and material handling, these options let you dial in the right setup for every job.

- Auxiliary Outriggers
- Second Set of Tool Power Ports
- 24" Platform Elevator
- Various Pedestal Heights
- Automatic Boom Latch
- SlopeMax™
- Hydraulic Jib/Winch (Reduces Platform Capacity 100 lbs)
- Jib up to 1000 lb (454 kg) Capacity

THE VERSALIFT DIFFERENCE

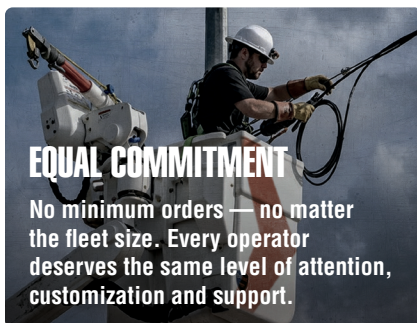

What do you need to get the job done? Versalift answers with trucks, digger derricks and cable placers built around how crews actually work. How you move, what you need and what the job demands. Delivering more payload, better efficiency and less downtime. Because when your truck is Built Your Way, the work just works.