

T-30/34-I

Insulated Heavy-Duty Telescopic Unit

- **WORKING HEIGHT:** Up to 38 ft 10 in (11.8 m)
with Standard Pedestal
- **HORIZONTAL REACH:** Up to 24 ft 3 in (7.4 m)
- **PLATFORM CAPACITY:** Up to 600 lbs (272 kg)

ELECTROGARD

HEAVY DUTY
AERIAL

MATERIAL
HANDLING
OPTIONAL

HIGH PLATFORM
CAPACITY



T-30-I model shown here.

VERSALIFT[®]

**LOWER TRUE
COST OF
OWNERSHIP**

T-30/34-I

Insulated Heavy-Duty Telescopic Unit



GENERAL SPECIFICATIONS:

(Based on 40 in Frame)

Horizontal Reach

T-30-I 20 ft 3 in (6.2 m)

T-34-I 24 ft 3 in (7.4 m)

Maximum Rated Platform Capacity 600 lbs (272 kg)

Inner Boom Extension

T-30-I 79 in (2.0 m)

T-34-I 103 in (2.6 m)

Outer/Inner Boom Articulation -25° to +85°

Rotation 360° Continuous

WITH STANDARD PEDESTAL:

Height to Bottom of Platform

T-30-I 29 ft 10 in (9.1 m)

T-34-I 33 ft 10 in (10.3 m)

Working Height

T-30-I 34 ft 10 in (10.6 m)

T-34-I 38 ft 10 in (11.8 m)

Stowed Travel Height 11 ft 6 in (3.5 m)

INSULATION GAP:

Upper Boom Fully Retracted

T-30-I 41 in (1.0 m)

T-34-I 46 in (1.2 m)

HYDRAULIC SYSTEM:


Operating Pressure 3000 psi (207 bars)

Flow Rate 6 gpm (22.7 lpm)

System Type Open Center

OPTIONS:

- Backup 12-Volt Pump
- Engine Throttle Controls
- Extra Control Circuit
- Jib up to 1000 lb (454 kg) Capacity
- Outriggers
- Platform Elevator (Single Platform Only)
- Remote Lower Control
- Second Set of Tool Power Ports
- Various Jib Configuration
- Various Pedestal Heights
- Various Platforms, Covers and Liners

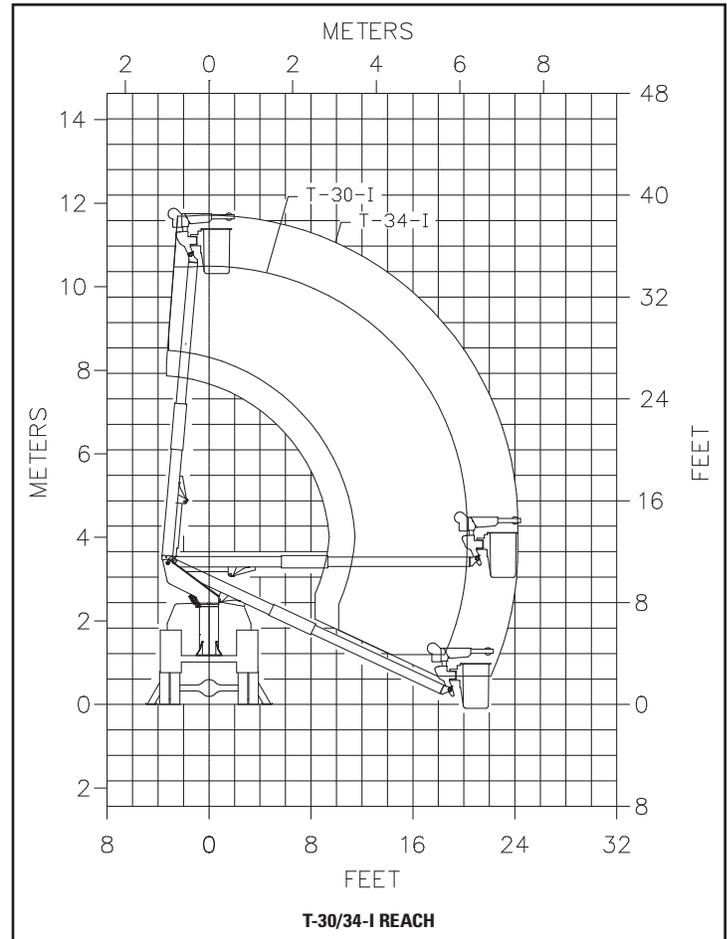

Note: Specifications on units may vary or change without prior notification due to option selections.

REV. 04/20

VERSALIFT is a leading manufacturer of bucket trucks, digger derricks and cable placers. Customers in the electric utility, telecommunications, forestry and sign, light & traffic industries experience a lower true cost of ownership by choosing Versalift. Our equipment is engineered to be lighter, while keeping the designs simple, which provides advantages like less unscheduled maintenance, greater payloads and ease of maintenance. Versalift has the lowest recall rate in the industry making it the smarter and most reliable choice. Versalift aerial lifts are the only units to feature the patented TruGuard® safety system, which provides additional protection to linemen in the bucket. Versalift is a Time Manufacturing Company, and together with Aspen Aerials has more than 1,400 employees worldwide.