

VST-7500-I

Insulated Articulated Telescopic Aerial Device

- **WORKING HEIGHT:** Up to 80 ft 0 in (24.4 m)
- **HORIZONTAL REACH:** Up to 46 ft 10 in (14.3 m)
- **PLATFORM CAPACITY:** Up to 800 lbs (360 kg)

**BEST
IN CLASS**
PAYLOAD

**FULL-PRESSURE
HYDRAULIC**
UPPER CONTROLS

JIB CAPACITY
UP TO 2000 LB (OPTIONAL)



VERSALIFT[®]

**LOWER TRUE
COST OF
OWNERSHIP**

VST-7500-I

Insulated Articulated/Telescopic Aerial Device



GENERAL SPECIFICATIONS:

(Based on 40 in Frame)

| | |
|-------------------------------|----------------------|
| Horizontal Reach | 46 ft 10 in (14.3 m) |
| Maximum Platform Capacity | 800 lbs (360 kg) |
| Inner Boom Extension | 138 in (3.5 m) |
| Outer/Inner Boom Articulation | -25° to +75° |
| Lower Boom Articulation | 0° to +80° |
| Rotation | 360° continuous |

WITH STANDARD PEDESTAL:

| | |
|------------------------------|---------------------|
| Height to Bottom of Platform | 75 ft 0 in (22.9 m) |
| Working Height | 80 ft 0 in (24.4 m) |
| Stowed Travel Height | 12 ft 5 in (3.8 m) |

INSULATION GAP:


| | |
|------------|----------------|
| Upper Boom | 108 in (2.7 m) |
| Lower Boom | 24 in (0.61 m) |

HYDRAULIC SYSTEM:

| | |
|--------------------|---|
| Operating Pressure | 3000 psi (207 bar) |
| Flow Rate | 10 gpm (38 lpm) |
| Filtration | 10 micron pressure & return 100 mesh suction |
| System Type | Open Center |

OPTIONS:

- 4-Axis Control
- Automatic Boom Latch
- Backup 12-Volt Pump
- Extra Control Circuit
- Various Jib Configurations
- Jib up to 2000 lb (907 kg) capacity
- Lift Eye (1500 lb max)
- Second Set of Tool Power Ports
- Tool Power at Ground Controls
- Various Outriggers
- Various Platforms, Covers and Liners

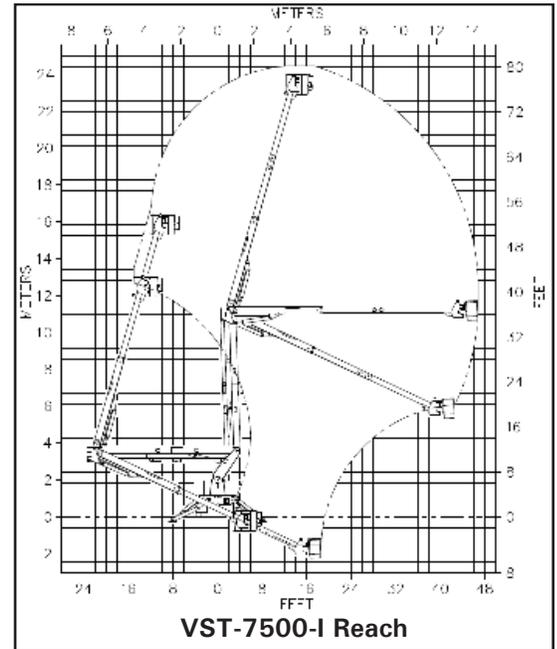

Note: Specifications on units may vary or change without prior notification due to option selections.

REV. 06/25

VERSALIFT is a leading manufacturer of bucket trucks, digger derricks and cable placers. Customers in the electric utility, telecommunications, forestry and sign, light & traffic industries experience a lower true cost of ownership by choosing Versalift. Our equipment is engineered to be lighter, while keeping the designs simple, which provides advantages like less unscheduled maintenance, greater payloads and ease of maintenance. Versalift has the lowest recall rate in the industry making it the smarter and most reliable choice. Versalift aerial lifts are the only units to feature the patented TruGuard® safety system, which provides additional protection to linemen in the bucket. Versalift is a Time Manufacturing Company, and together with Aspen Aerials has more than 1,000 employees worldwide.

REV. 03/19