

VST-7500-I-E100/108

Insulated Articulated/Telescopic Aerial Device with Elevator

- **WORKING HEIGHT:** Up to 111 ft 11 in (34.1 m)
- **HORIZONTAL REACH:** Up to 46 ft 10 in (14.3 m)
- **PLATFORM CAPACITY:** Up to 800 lbs (360 kg)

**BEST
IN CLASS
PAYLOAD**

**FULL-PRESSURE
HYDRAULIC
UPPER CONTROLS**

**JIB CAPACITY
UP TO 2000 LB (OPTIONAL)**



VST-7500-E108 model shown here.

VERSALIFT®



VST-7500-I-E100/108



Insulated Articulated/Telescopic Aerial Device with Elevator

GENERAL SPECIFICATIONS:

(Based on 40 in Frame)

Horizontal Reach	46 ft 10 in (14.3 m)
Maximum Platform Capacity	800 lbs (360 kg)
Inner Boom Extension	138 in (3.5 m)
Outer/Inner Boom Articulation +/- 2°	
VST-7500-I-E100	-25° to +75°
VST-7500-I-E108	-25° to +75°
Lower Boom Articulation +/- 2°	
VST-7500-I-E100	0° to +80°
VST-7500-I-E108	0° to +88°
Rotation	360° continuous

WITH STANDARD PEDESTAL:

Height to Bottom of Platform	
VST-7500-I-E100	98 ft 11 in (30.2 m)
VST-7500-I-E108	106 ft 11 in (32.6 m)
Working Height	
VST-7500-I-E100	103 ft 11 in (31.7 m)
VST-7500-I-E108	111 ft 11 in (34.1 m)
Stowed Travel Height	12 ft 6 in (3.8 m)

INSULATION GAP:

Upper Boom	108 in (2.7 m)
Lower Boom	24 in (0.61 m)



HYDRAULIC SYSTEM:

Operating Pressure	3000 psi (207 bar)
Flow Rate	10 gpm (38 lpm)
Filtration	10 micron pressure 10 micron return 100 mesh suction
System Type	Open Center

OPTIONS:

- 4-Axis Control
- Automatic Boom Latch
- Backup 12-Volt Pump
- Extra Control Circuit
- Various Jib Configurations
- Jib up to 2000 lb (907 kg) capacity
- Lift Eye (1500 lb max)
- Second Set of Tool Power Ports
- Tool Power at Ground Controls
- Various Outriggers
- Various Platforms, Covers and Liners

Note: Specifications on units may vary or change without prior notification due to option selections.

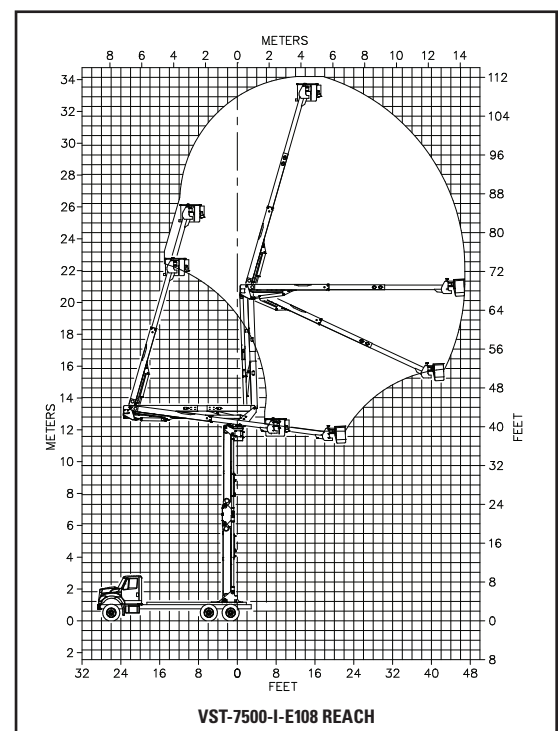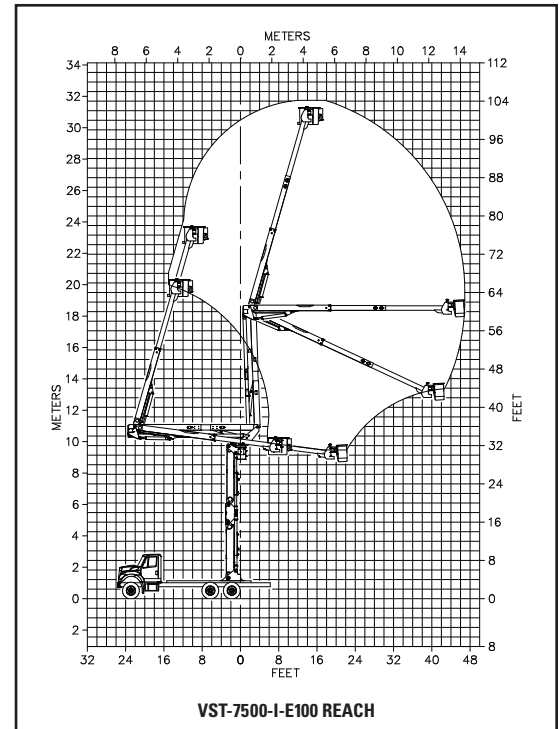

REV. 09/19

VERSALIFT is a leading manufacturer of bucket trucks, digger derricks and cable placers. Customers in the electric utility, telecommunications, forestry and sign, light & traffic industries experience a lower true cost of ownership by choosing Versalift. Our equipment is engineered to be lighter, while keeping the designs simple, which provides advantages like less unscheduled maintenance, greater payloads and ease of maintenance. Versalift has the lowest recall rate in the industry making it the smarter and most reliable choice. Versalift aerial lifts are the only units to feature the patented TruGuard® safety system, which provides additional protection to linemen in the bucket. Versalift is a Time Manufacturing Company, and together with Aspen Aerials has more than 1,000 employees worldwide.

REV. 03/19